
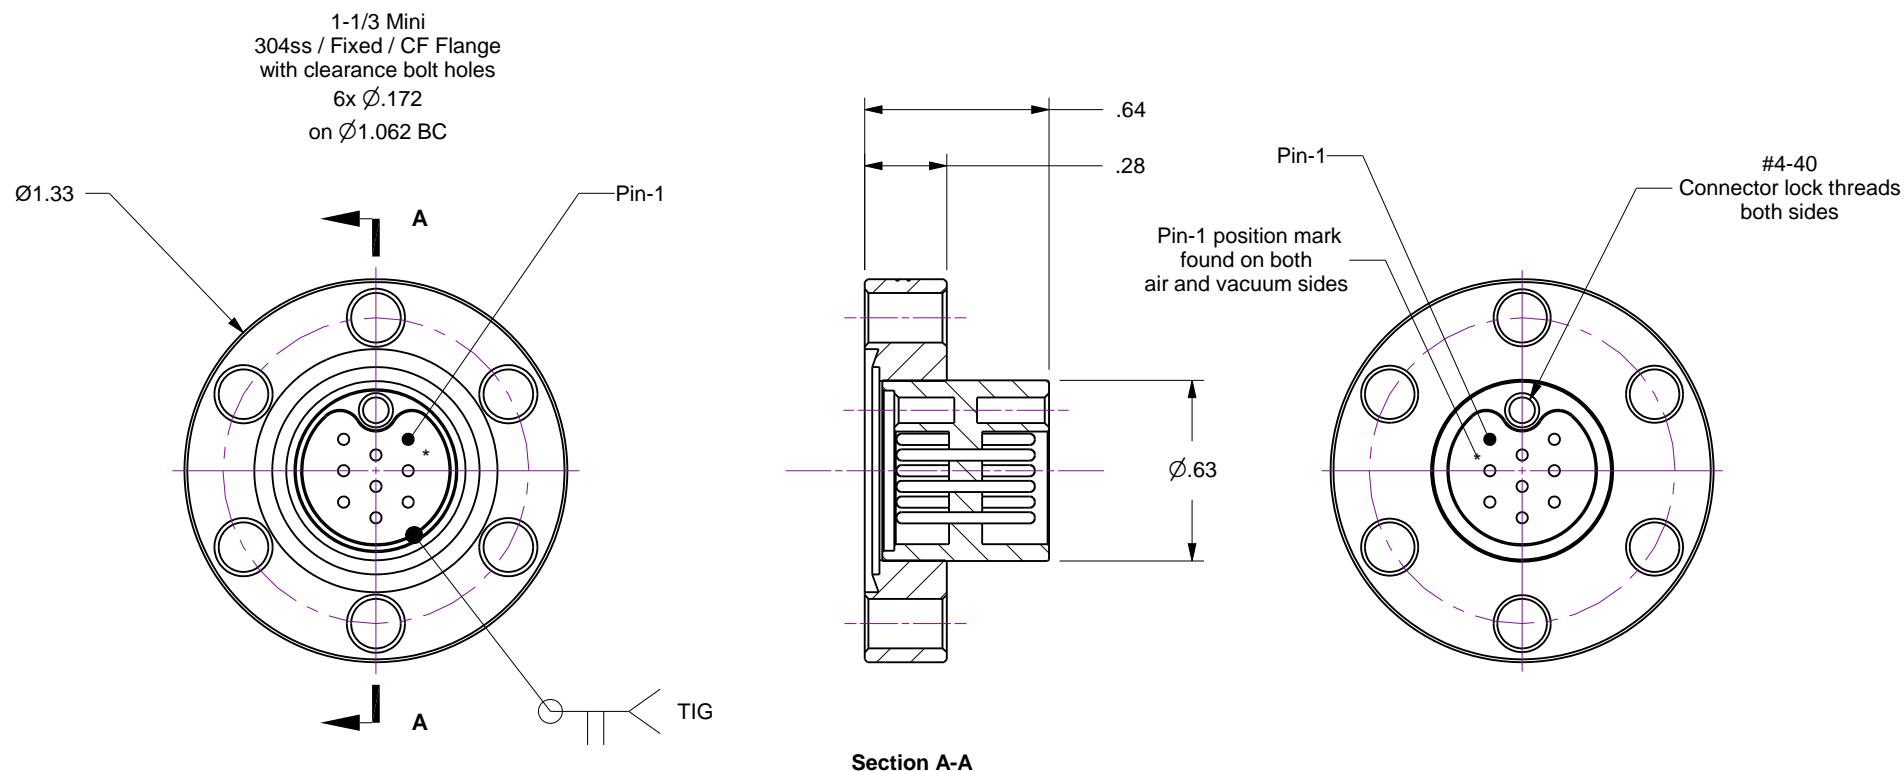


1. Leak test to 5x10E-10 Standard cc/sec of He
2. Product Specifications... Voltage, 500 VAC / Current, 5 amps per pin maximum @ 20 C (up to 20% of total number of pins) / Temperature / -200 to 250 C / Vacuum, UHV, 1x10E-10 Torr
3. Related Hardware... Copper Gaskets, AG Part No. 200730 / Bolts, Nuts, Washers, AG Part No. 200735
4. Due to feedthrough's straight-through pin construction air-to-vacuum pin positions are reversed (mirrored).

Rev	Description	Date
B	Low temperature specification	20140814 / AL



**Accu-Glass Products Inc.**  
25047 Anza Drive  
Valencia, CA 91355  
T 818-365-4215  
F 818-365-7074  
[www.accuglassproducts.com](http://www.accuglassproducts.com)

## UNCONTROLLED WEB DRAWING

Proprietary and Confidential  
The information contained in this drawing is the sole property of Accu-Glass, Products Inc. Any reproduction, in part or as whole, without the written permission of Accu-Glass Products, Inc., is strictly prohibited.

Material	See Individual Components
----------	---------------------------

Tolerances,  
unless otherwise specified

.X ± .030	Angles ± 0.5° Finish 63Ra
.XX ± .010	
.XXX ± .005	

	Title
--	-------

FT, Subminiature-C, 9-Pin, 1.33 CF

Drawn by	
Date	

y	Ligeti
e	8/14/2014

No.	100010
-----	--------

Rev.	
------	--

Approved

Sheet