
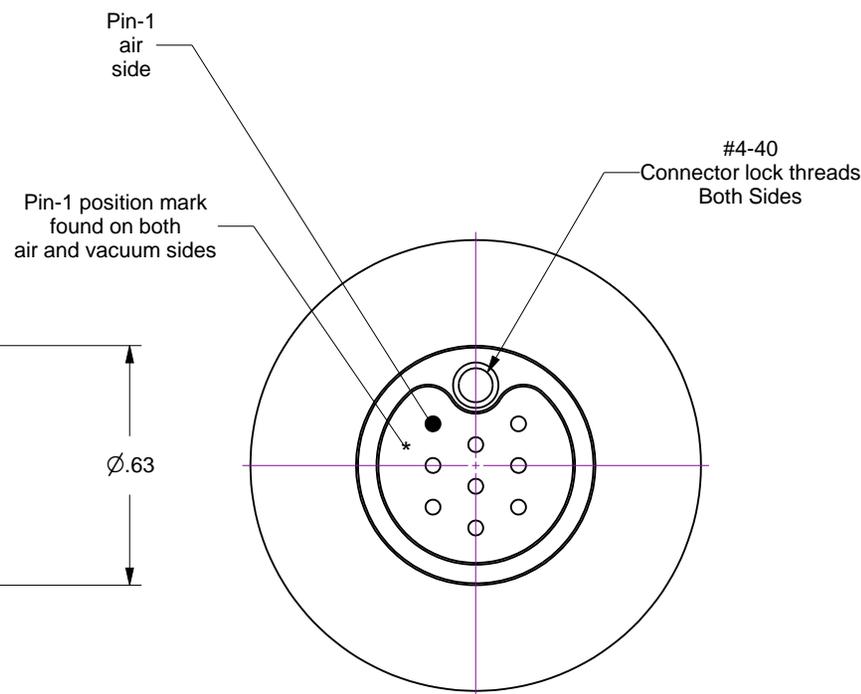
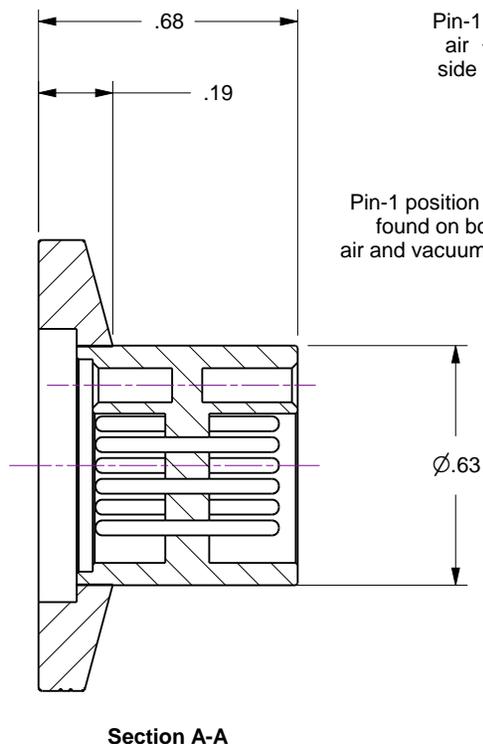
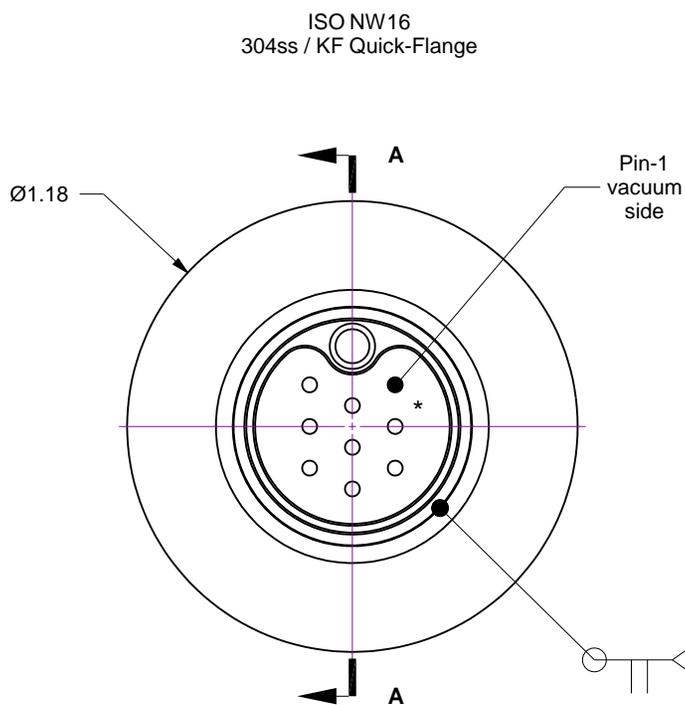


Notes

- 1. Leak test to 5x10E-10 Standard cc/sec of He
- 2. Product Specifications... Voltage, 500 VAC / Current, 5 amps per pin maximum @ 20 C (up to 20% of total number of pins) / Temperature, -26 to 150 C with Viton compound elastomer gasket / Vacuum, HV High-Vacuum, 1x10E-8 Torr
- 3. Related Hardware... Centering Ring with Gasket, AG Part No. 202200 / Hinged Clamp, AG Part No. 202205
- 4. Due to feedthrough's straight-through pin construction air-to-vacuum pin positions are reversed (mirrored).

Rev	Description	Date
B	Low temperature specifications	



Accu-Glass Products Inc.
 25047 Anza Drive
 Valencia, CA 91355
 T 818-365-4215
 F 818-365-7074
 www.accuglassproducts.com

UNCONTROLLED WEB DRAWING

Proprietary and Confidential
 The information contained in this drawing is the sole property of Accu-Glass, Products Inc. Any reproduction, in part or as whole, without the written permission of Accu-Glass Products, Inc., is strictly prohibited.

Material See Individual Components	
Tolerances, unless otherwise specified	
.X ± .030	Angles ± 0.5° Finish 63Ra
.XX ± .010	
.XXX ± .005	

Title FT, Subminiature-C, 9-Pin, ISO NW16			
Drawn by Date	Ligeti 8/18/2014	No. 100011	Rev. B
Approved			Sheet