
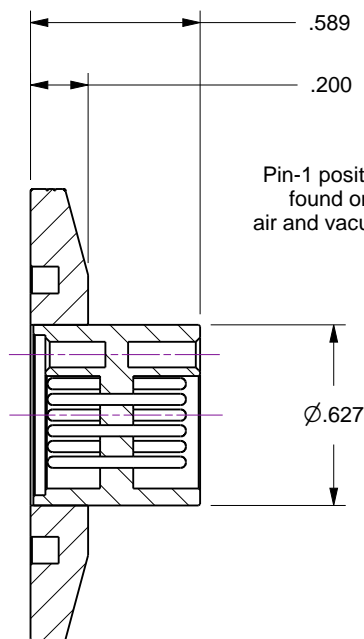
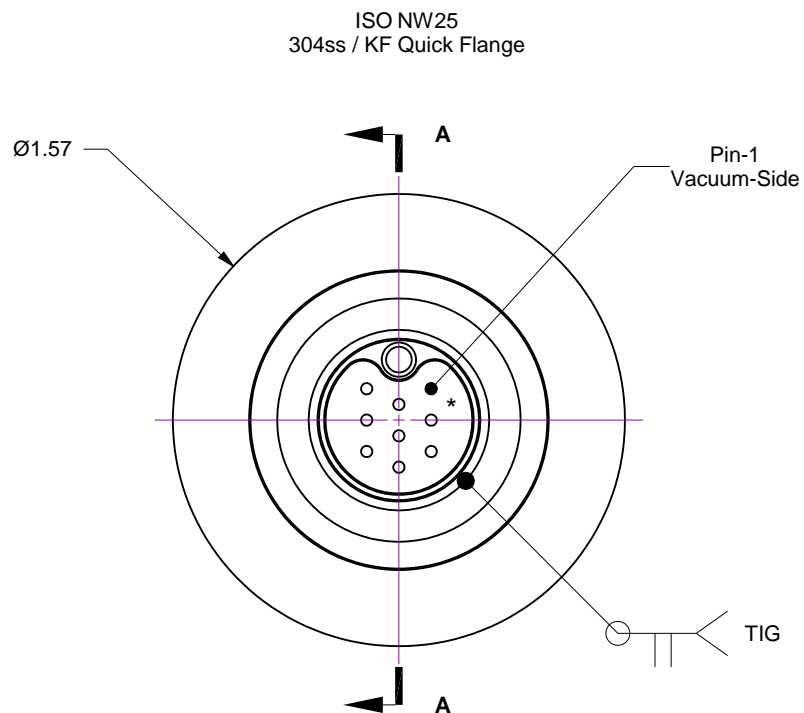



## Notes

1. Leak test to 5x10E-10 Standard cc/sec of He
2. Product Specifications... Voltage, 500 VAC / Current, 5 amps per pin maximum @ 20 C (up to 20% of total number of pins) / Temperature, -26 to 150 C with Viton compound elastomer gasket / Vacuum, HV High-Vacuum, 1x10E-8 Torr
3. Related Hardware... Centering Ring with Gasket, AG Part No. 202210 / Hinged Clamp, AG Part No. 202215
4. Due to feedthrough's straight-through pin construction air-to-vacuum pin positions are reversed (mirrored).

Rev	Description	Date
A	Initial Release	



Section A-A

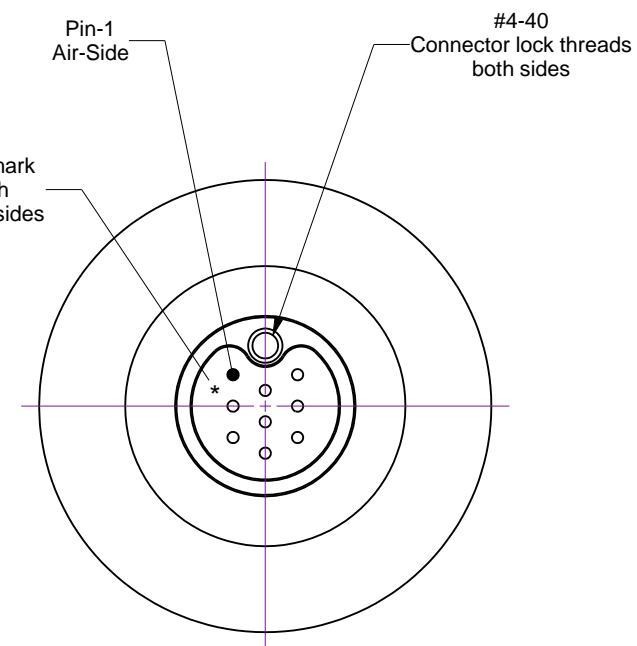

**Accu-Glass Products Inc.**  
 25047 Anza Drive  
 Valencia, CA 91355  
 T 818-365-4215  
 F 818-365-7074  
 www.accuglassproducts.com

**UNCONTROLLED WEB DRAWING**

Proprietary and Confidential  
 The information contained in this drawing is the sole property of Accu-Glass, Products Inc. Any reproduction, in part or as whole, without the written permission of Accu-Glass Products, Inc., is strictly prohibited.

Material  
 See Individual Components

Tolerances,  
 unless otherwise specified

.X ± .030	Angles ± 0.5° Finish 63Ra
.XX ± .010	
.XXX ± .005	

Title

FT, Subminiature-C, 9-Pin, ISO NW25

Drawn by	Ligeti	No.	Rev.
Date	8/18/2014	100016	A
Approved			Sheet