



PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 ACCU-GLASS PRODUCTS INC. ANY
 REPRODUCTION IN PART OR AS WHOLE
 WITHOUT THE WRITTEN PERMISSION OF
 ACCU-GLASS PRODUCTS INC. IS
PROHIBITED.

Rev	Description	Date	Approved

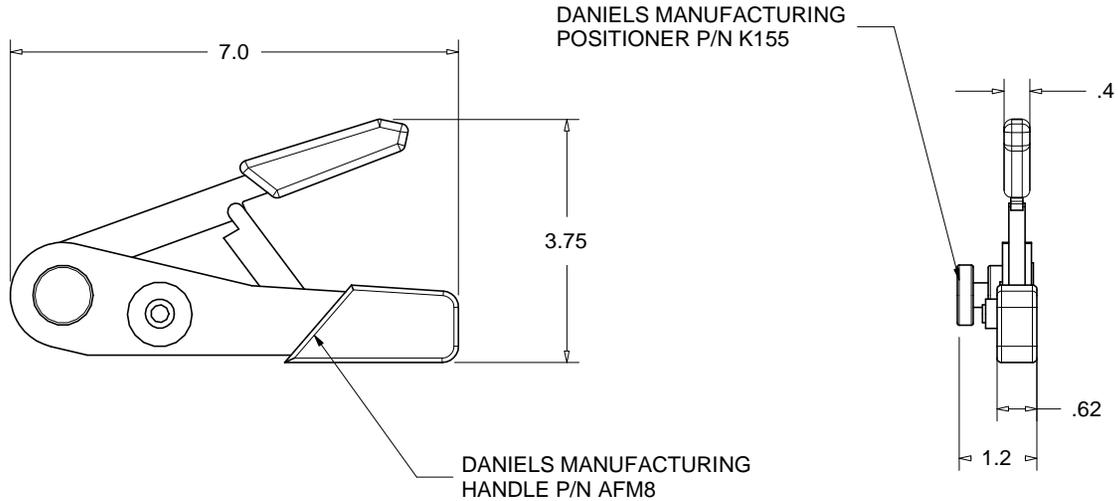

RELATED CONTACTS, CRIMP TOOL	
P/N 100170, STD., MALE, TYPE T-1, USE WITH 20-24AWG WIRE	
P/N 100171, STD., MALE, TYPE T-1, USE WITH 26-30AWG WIRE	
P/N 100180, STD., FEMALE, TYPE T-1, USE WITH 20-24AWG WIRE	
P/N 100181, STD., FEMALE, TYPE T-1, USE WITH 26-30AWG WIRE	
P/N 110908, HIGH-USE, FEMALE ASSY, USE WITH 20-24AWG WIRE	
P/N 110909, HIGH-USE, FEMALE ASSY, USE WITH 26-30AWG WIRE	
P/N 100980, CHROMEL, FEMALE, USE WITH 20-24AWG WIRE	
P/N 100981, CHROMEL, MALE, USE WITH 20-24AWG WIRE	
P/N 100990, ALUMEL, FEMALE, USE WITH 20-24AWG WIRE	
P/N 100991, ALUMEL, MALE, USE WITH 20-24AWG WIRE	
P/N 111323, HIGH-USE, CHROMEL, USE WITH 20-24 AWG WIRE	
P/N 111324, HIGH-USE, ALUMEL, USE WITH 20-24AWG WIRE	
P/N 111315, Crimp Tool Positioner USE WITH High-Use Contacts	

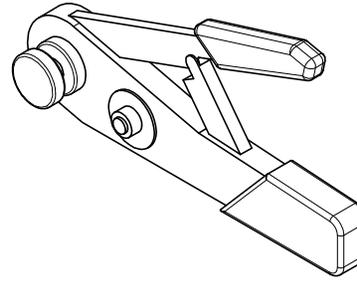

Accu-Glass Products Inc.
 25047 Anza Drive
 Valencia, CA 91355
 TEL 818-365-4215
 FAX 818-365-7074
 accuglassproducts.com

Notes:
 1. DIMENSIONS SYMMETRICAL ABOUT CENTERLINES

UNCONTROLLED WEB COPY

Material ASSEMBLY	
Tolerances unless otherwise specified.	
.X ± .03	Angular: +/- .5°
.XX ± .01	Finish: Min. 63 Ra
.XXX ± .005	

Title: DCT-1 CRIMP TOOL, STD, CONTACT TYPE T-1			
Drawn By Date	CR 080309	DWG. NO. 100190	Rev. A
Approved	C M	PDFE	Sheet 1 OF 1