

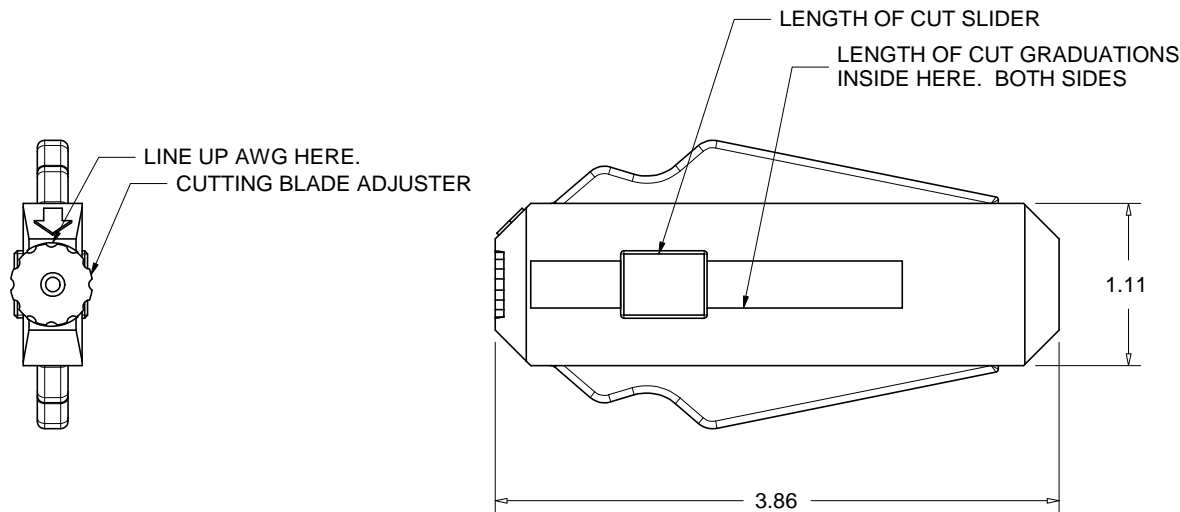


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
ACCU-GLASS PRODUCTS INC. ANY
REPRODUCTION IN PART OR AS WHOLE
WITHOUT THE WRITTEN PERMISSION OF
ACCU-GLASS PRODUCTS INC.IS
PROHIBITED.

Rev	Description	Date	Approved



INSTRUCTION FOR USE

1. ADJUST SLIDER TO DESIRED LENGTH OF CUT GRADUATIONS ON INSIDE OF SLOT.
2. ADJUST CUTTING BLADES, LINE UP ARROW TO AWG DESIRED.
3. INSERT WIRE THROUGH HOLE UNTIL IT LOCATES ON SLIDER.
4. SQUEEZE YELLOW HANDLES THEN ROTATE 1/4 TURN IN BOTH DIRECTIONS (1/2 TURN TOTAL MOVEMENT)
5. MAINTAINING SQUEEZE PULL OFF INSULATION.



Accu-Glass Products Inc.
25047 Anza Drive
Valencia, CA 91355
TEL 818-365-4215
FAX 818-365-7074
accuglassproducts.com

Notes:

1. DIMENSIONS SYMMETRICAL ABOUT CENTERLINES

UNCONTROLLED WEB COPY

Material

ASSEMBLY

Tolerances unless otherwise
specified.

.X \pm .03	Angular: +/- .5°
.XX \pm .01	Finish: Min. 63 Ra
.XXX \pm .005	

Title: **2636AWG-STR
WIRE STRIPPER 26-36 AWG WIRE**

Drawn By Date	CR 080409	DWG. NO. 100191	Rev. A
Approved	C M	PDFE	Sheet 1 OF 1