



1  
2  
3  
4

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
ACCU-GLASS PRODUCTS INC. ANY  
REPRODUCTION IN PART OR AS WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
ACCU-GLASS PRODUCTS INC.IS  
**PROHIBITED.**

PIN NUMBER ASSIGNMENTS  
FEMALE 15D CONNECTOR






REAR VIEW



Rev	Description	Date	Approved
A	INITIAL RELEASE	022310	C M

4-40 VENTED  
SOCKET HEAD  
CAP SCREW  
SS 2 PLS

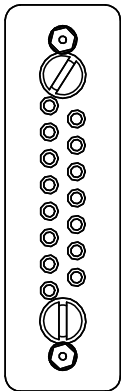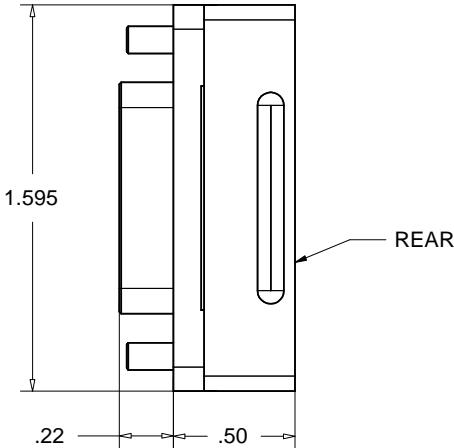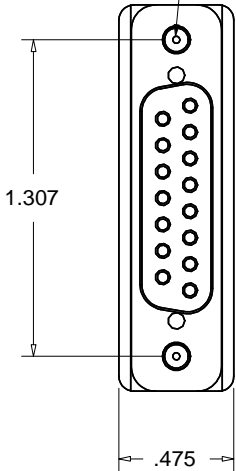

RELATED CONTACTS, TYPE-T1
P/N 100180, STANDARD, USE WITH 20-24AWG WIRE
P/N 100181, STANDARD, USE WITH 26-30AWG WIRE
P/N 110908, HIGH-USE, USE WITH 20-24AWG WIRE
P/N 110909, HIGH-USE, USE WITH 26-30AWG WIRE
P/N 100190, CRIMP TOOL FOR TYPE-T1 CONTACTS
P/N 100455, BACKSHELL STRAIN RELIEF

\* NOTE: CONTACT RETAINING COMBS INCLUDED (NOT SHOWN)



Accu-Glass Products Inc.  
25047 Anza Drive  
Valencia, CA 91355  
TEL 818-365-4215  
FAX 818-365-7074  
accuglassproducts.com

Notes:  
1. DIMINSIONS SYMMETRICAL ABOUT CENTERLINES  
2. CONTACTS NOT INCLUDED

**\*UNCONTROLLED WEB COPY\***

Material PEEK / STAINLESS	
Tolerances unless otherwise specified.	
.X ± .03	Angular: +/- .5°
.XX ± .01	Finish: Min. 63 Ra
.XXX ± .005	

Title: 15D-PKS PEEK 15D FEMALE CONNECTOR ASSEMBLY			
Drawn By Date	CR 022310	DWG. NO. 100450	Rev. A
Approved	C M	PDFE	Sheet 1 OF 1