


- 1 4 Conductor PVC Jacket and aluminum-mylar foil shielding with a 24 AWG tinned-copper drain wire.
The 4 individual conductors are PVC insulated 24 AWG, 7x 0.008 stranded, tinned copper wires.

- 2 RG174/U Coaxial cable.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

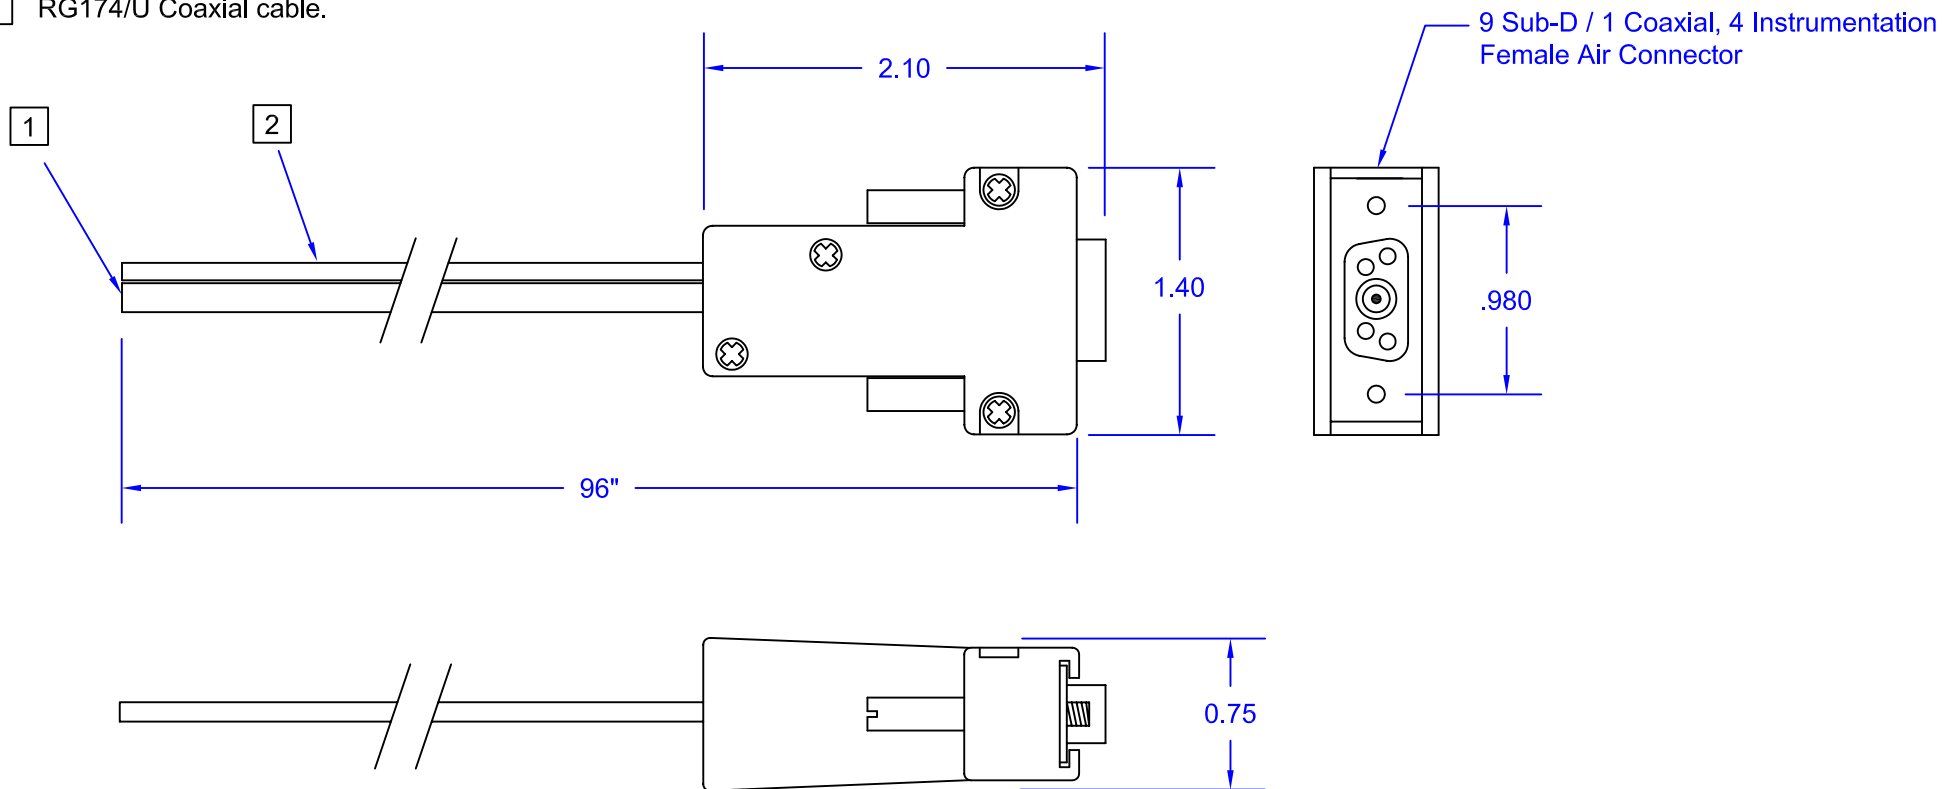

Accu-Glass Products Inc.
25047 Anza Drive
Valencia, CA 91355
TEL 818-365-4215
FAX 818-365-7074
accuglassproducts.com

Notes :

*** UNCONTROLLED WEB COPY ***

Material		Title 9AIR-1CX4i-96SC Female Socket Air Connector to Cable		
Tolerances unless otherwise specified		Drawn By	M.Wilson	DWG NO. 100530
Decimal	Angular	Approved		Date 8-28-07
.xx= +/- .005	+/- 1°			Cage Code : 4HCQ8
.xxx= +/- .002				