


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

- 1 4 Conductor PVC Jacket and aluminum-mylar foil shielding with a 24 AWG tinned-copper drain wire.
The 4 individual conductors are PVC insulated 24 AWG, 7x 0.008 stranded, tinned copper wires.

- 2 RG174/U Coaxial cable, 6 inches long.

- 3 BNC Connector

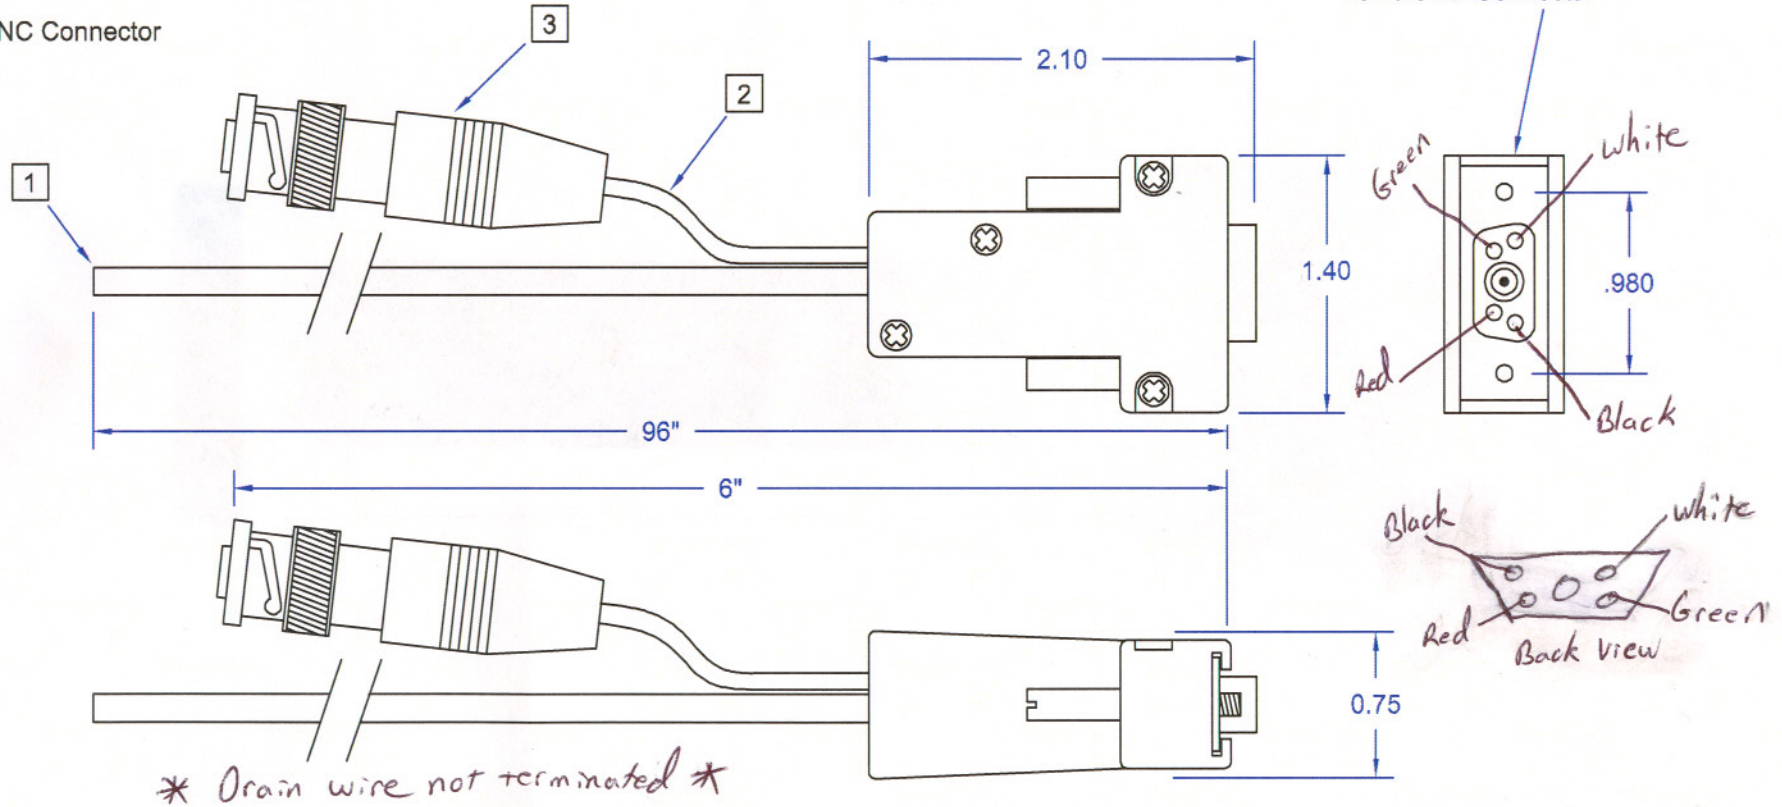

Accu-Glass Products Inc.
25047 Anza Drive
Valencia, CA 91355
TEL 818-365-4215
FAX 818-365-7074
accuglassproducts.com

Notes :

*** UNCONTROLLED WEB COPY ***

Material

Tolerances unless
otherwise specified
Decimal Angular
.xx= +/- .005 +/- 1°
.xxx= +/- .002

Title

9AIR-1CX4i-06SSC
Female Socket Air Connector to Male BNC Connector

Drawn By

M.Wilson

DWG NO.

100560

Date
8-28-07

Approved

PDFE

Cage Code : 4HCQ8