


1
2
3
4

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
ACCU-GLASS PRODUCTS INC. ANY
REPRODUCTION IN PART OR AS WHOLE
WITHOUT THE WRITTEN PERMISSION OF
ACCU-GLASS PRODUCTS INC.IS
PROHIBITED.

PIN NUMBER ASSIGNMENTS
FEMALE 9D CONNECTOR




REAR VIEW

PIN OUT

CONNECTOR		DISCRIPTION
A	-	B
1	-	5 28 AWG KAPTON
2	-	4 28 AWG KAPTON
3	-	3 28 AWG KAPTON
4	-	2 28 AWG KAPTON
5	-	1 28 AWG KAPTON
6	-	9 28 AWG KAPTON
7	-	8 28 AWG KAPTON
8	-	7 28 AWG KAPTON
9	-	6 28 AWG KAPTON

-A-
CONNECTOR

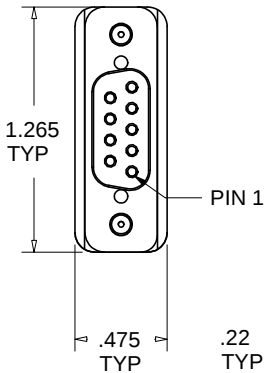

REAR


9 WAY KAPTON INSULATED
RIBBON, STRANDED, SILVER PLATED
WIRES. 28 AWG WITH PEEK BRAID

19.0

9D PEEK FEMALE
CONNECTOR ASSEMBLY
WITH CONTACT SOCKETS
BOTH ENDS

4-40 VENTED SOCKET
HEAD CAP SCREW
STAINLESS
2 PER CONNECTOR

-B-
CONNECTOR



Accu-Glass Products Inc.
25047 Anza Drive
Valencia, CA 91355
TEL 818-365-4215
FAX 818-365-7074
accuglassproducts.com

Notes:
1. DIMINSIONS SYMMETRICAL ABOUT CENTERLINES

UNCONTROLLED WEB COPY

Material
assembly

Tolerances unless otherwise
specified.

.X ± .03	Angular: +/- .5°
.XX ± .01	Finish:
.XXX ± .005	Min. 63 Ra

Title: **KAP-R9-192SC**

9D FEMALE EACH END KAPTON RIBBON 19"LG

Drawn By Date	CR 2/16/2010	DWG. NO. 100880	Rev. A
Approved	C M	PDFE	Sheet 1 OF 1