
Notes


1. Dimensions symmetrical about centerlines


2. Related Hardware (slod separately) 101000 / Contact, Type-T3 / 0.142 Female Sockets 101080 / Contact crimp tool 100935 / Contact extraction tool

Rev.	Description	Date	Made By	Approva
Α	Initial Release			





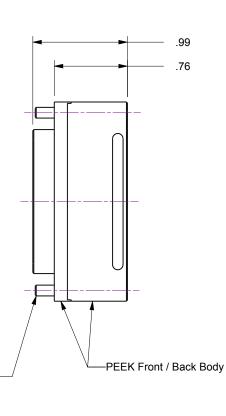



25D-5P-PKS

Accu-Glass Products Inc. 25047 Anza Drive Valencia, CA 91355 T 818-365-4215 F 818-365-7074 www.accuglassproducts.com

## **UNCONTROLLED WEB DRAWING**

# 4-40

Captured / Vented Socket-Head Screws 2x

Proprietary and Confidential The information contained in this drawing is the sole property of Accu-Glass, Products Inc. Any reproduction, in part or as whole, without the written permission of Accu-Glass Products, Inc., is strictly prohibited.

	Material						
	PEEK						
	Tolerances, unless otherwise specified						
,	.X ± . 030 .XX ± .010	Angles ± 0.5°					

terial		Title					
PEE	K	5 PIN POWER 25D PEEK FEMALE CONN					
Tolerances, inless otherwise specified							
		Drawn by	CR		400000		Rev.
.X $\pm$ . 030		Date	10/1/2009	No.	100933		A
$.XX \pm .010$	Angles ± 0.5°					01	. 1
XXX ± .005	Finish 63Ra	Approved				She	et